172 x 150 x 38 mm

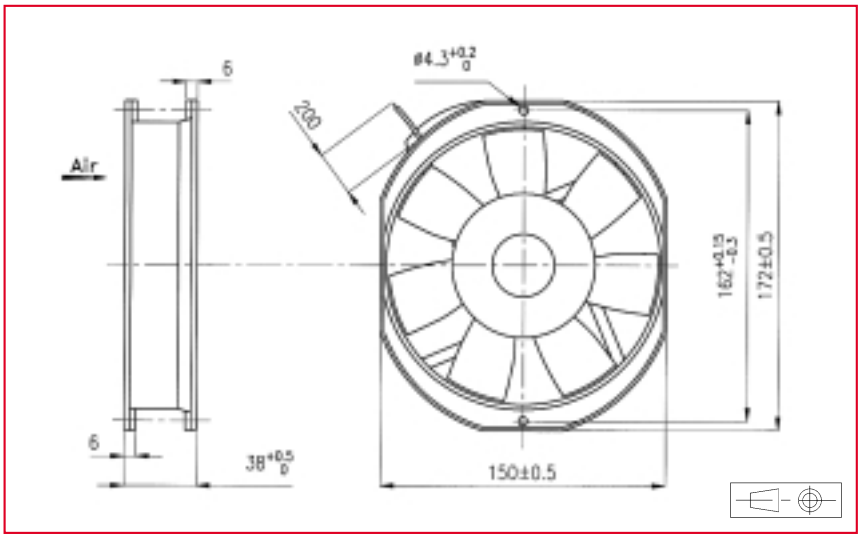

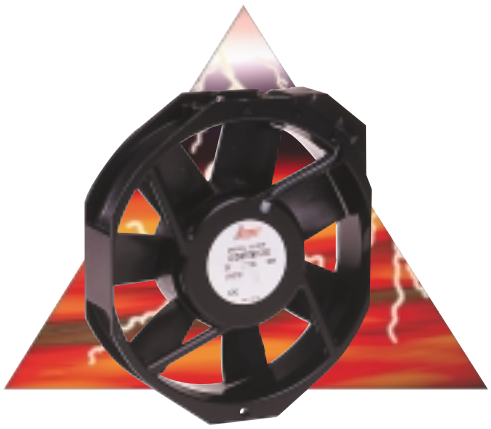

400 Hz Motor
Housing materia: aluminium
Impeller material: plastic UL 94 VO
Weight: 0,775 kg
Bearing system: ball bearings

Connection: flying leads

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
35 000 hours
For more details, see page 14

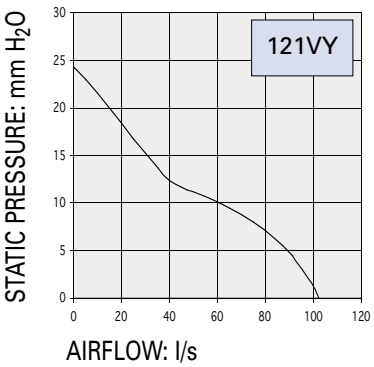

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor	Input power	Nominal current	Starting current	Operating temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min. °C	Max. °C
121VY0162001	115	103	62	3750	1	0,32	39	410	550	- 10	70
121VY0160001	200	103	62	3750	1	0,1	39	345	490	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 150, 151, 154, 157, 161 and 162

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition N°2 / 01.