ø 239,5 x 109 mm

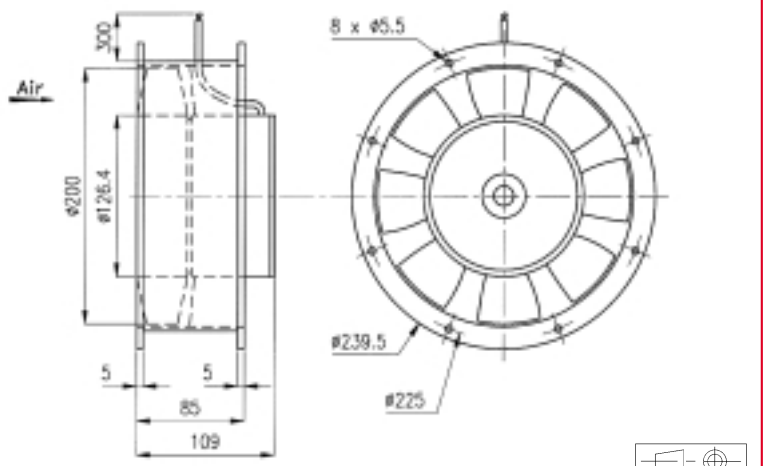

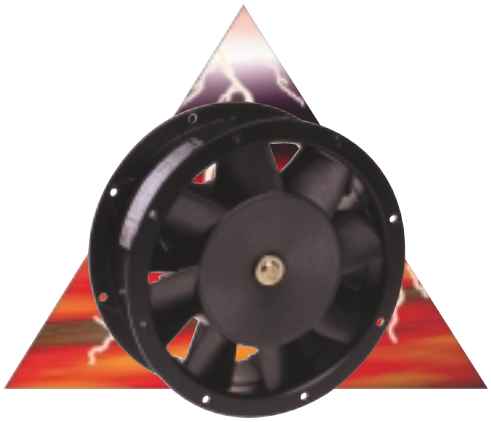

400 Hz Motor
Housing material: aluminium
Impeller material: aluminium
Weight: 4,7 kg
Bearing system: ball bearings

Connection: flying leads

Available with:
- safety switch

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
35 000 hours
For more details, see page 14

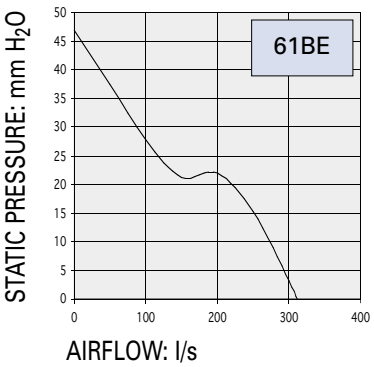

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor *(not included)*	Input power	Nominal current	Starting current	Operating temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min. °C	Max. °C
61BE0162C13	115	310	68	3500	3		126	1800	3650	- 10	70
	115	310	68	3500	1	5,7	134	1450	2800	- 10	70
61BE0160C13	200	310	68	3500	3		126	1030	2100	- 10	70
	200	310	68	3500	1	2	134	840	1600	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 155, 158, 159 and 163

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition N°2 / 01.