ø 180 x 104 mm

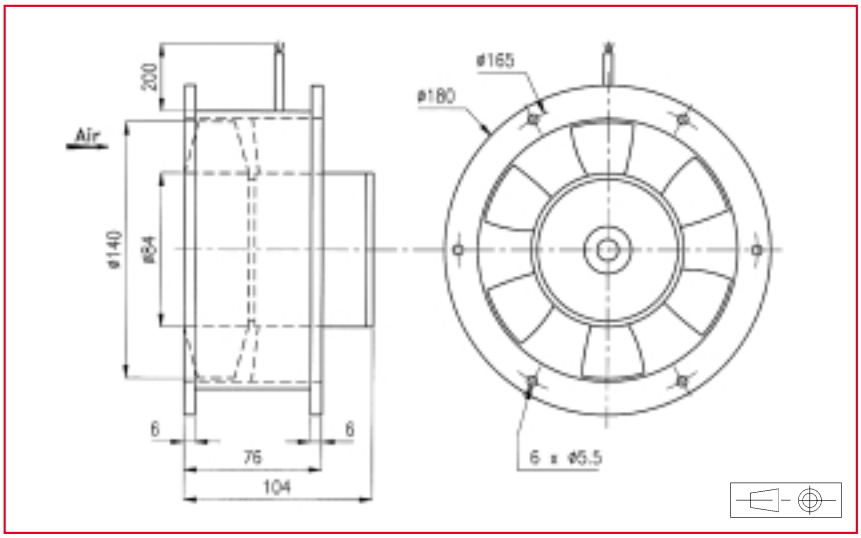

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
35 000 hours
For more details, see page 14

400 Hz Motor
Housing material: aluminium
Impeller material: aluminium
Weight: 2,6 kg
Bearing system: ball bearings
Connection: flying leads

Available with:
- safety switch

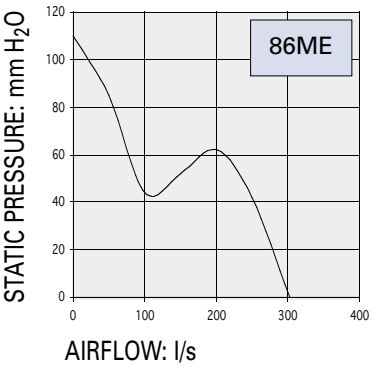

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor	Input power	Nominal current	Starting current	Operating temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min. °C	Max. °C
86ME0162C13	115	300	80	7400	3		400	3700	10000	- 10	70
86ME0160C13	200	300	80	7400	3		400	2100	5700	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 155, 156, 157 and 159

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition N°2 / 01.