92 x 92 x 38 mm

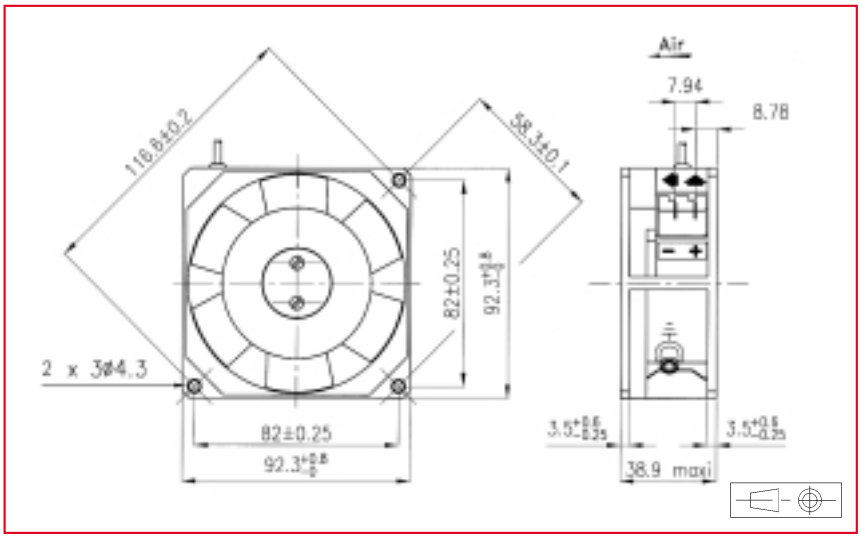

Brushless DC Motor
Electrical protection: integrated circuit
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 550 g

Available with:
- CMOS/TTL speed sensor

Approvals
See selection guide pages 15 to 26

Life expectancy
L-10 LIFE AT 40°C:
25 000 hours
For more details, see page 14

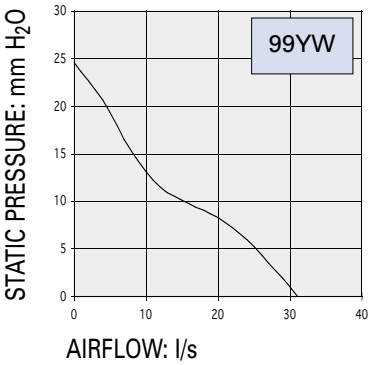

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Input power	Voltage range	Bearing system		Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	W	V	Ball	Sleeve	Leads	Terminals	Min. °C	Max. °C
99YW53C6200	24	31,0	53	5530	10	(21,6-26,4)	X			X	- 40	85
99YW53E6201	28	31,0	53	5500	11	(25,2-30,8)	X			X	- 40	85

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications

Accessories:
See pages: 148, 150, 151, 153, 154, 161 and 162

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition N°2 / 01.