92 x 92 x 25 mm

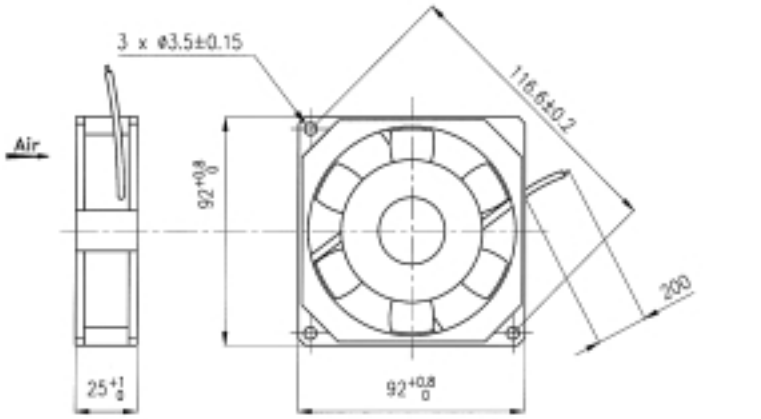

400 Hz Motor
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 0,390 kg
Bearing system: ball bearings
Connection: flying leads

Available with:
- speed sensor

Approvals
See selection guide pages 15 to 26
GAMT 1 listed

Life expectancy
L-10 LIFE AT 40°C:
35 000 hours
For more details, see page 14

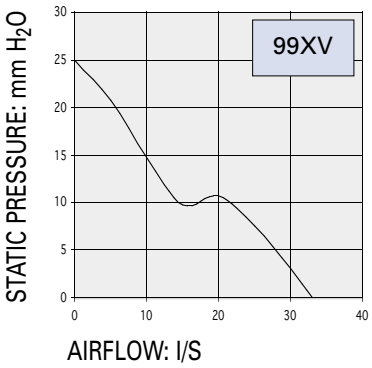

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor *(not included)*	Input power	Nominal current	Starting current	Operating temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min. °C	Max. °C
99XV0162001	115	33	55	5500	3		14	130	280	- 10	70
	115	33	55	5500	1	0,47	14	145	225	- 10	70
99XV0160001	200	33	55	5500	3		14	75	160	- 10	70
	200	33	55	5500	1	0,15	14	85	130	- 10	70

Additional versions:
Salt spray protected - shock and vibration protected - marine specifications - wide temperature range

Accessories:
See pages: 148, 150, 151, 154, 162 and 163

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition N°2 / 01.